



Hi-TECH 550BB/700BB/700BB⁺ 850BB/850BB⁺

High Rigid Big Bore Turning Centers



HIGH RIGID BIG BORE TURNING CENTERS

The extra scale through-spindles incorporated in the BB-series turning centers are built for turning those extra-length applications, such as the oil pipes. The heavy duty dual air chucks sitting in front and back of the spindle provides extra stability for increased productivity.




HIGH PERFORMANCE EXTRA-LARGE BIG BORE TURNING CENTERS

Line-Up

Bar Size

Hi-TECH 550BB/550BBL/550BBXL	Ø190 (Ø7.48")
Hi-TECH 700BB	Ø180 (Ø7.08")
Hi-TECH 700BB ⁺	Ø295 (Ø11.61")
Hi-TECH 850BB/850BBL/850BBXL	Ø295 (Ø11.61")
Hi-TECH 850BB ⁺ /850BB ⁺ L/850BB ⁺ XL	Ø370 (Ø14.56")

1 Drill Casing Adaptor/ Oil Field 2 Steel Oil Pipe/ Oil Field
3 Drill Pipes for Oil and Gas/ Oil Field 4 Land-Based Oil Rigs

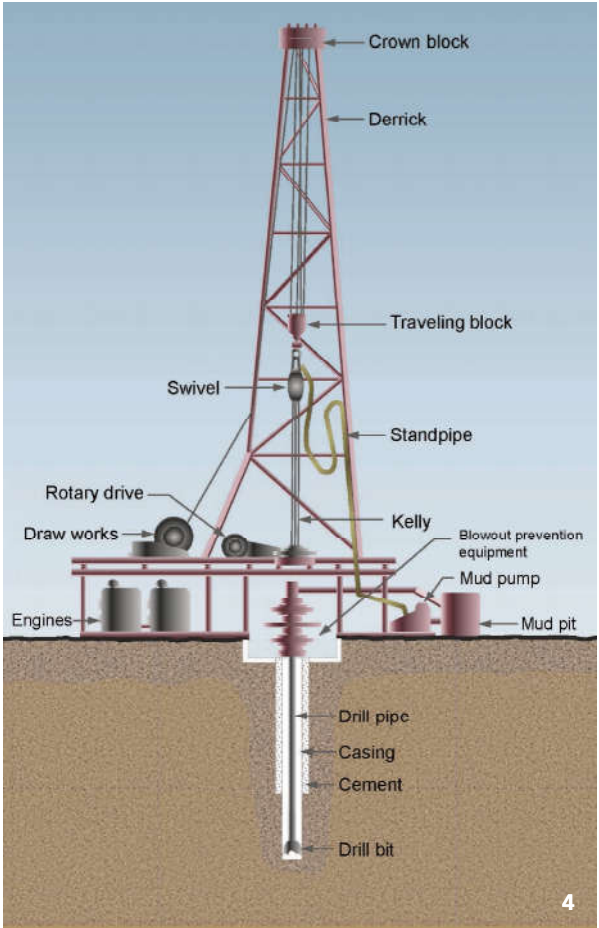

THE HI-TECH BB SERIES OF BOX-WAY, GEAR-BOX BIG BORE TURNING SOLUTIONS

Hwacheon's Hi-TECH 550BB, 700BB, 700BB+, 850BB, and 850BB+ turning centers are designed for most demanding industrial applications. These tough, highly precise machines employ extra-scale through-spindles, and the two heavy duty air chucks in front and rear of the spindle guarantee perfect results, every time.

The 45-degree tilt unibody bed equipped in each model is ideal for most demanding hard-turning jobs, and the Hi-TECH BB series turning centers employ the box way design in all guide surfaces for maximum stability and precision after hours of prolonged operation. The gear-transmission spindle assembly provides both low-torque and high speed turning enable increased productivity.



HIGH RIGID BIG BORE SPINDLE FOR OIL PIPE

Hwacheon provides you many different model options so you can have the right tool for your extra-length turning jobs and be more efficient. Choose from a $\text{\O}470$, $\text{\O}630$, or $\text{\O}850$ air chuck, or a manual chuck, to suit your applications.




Optional manual chuck in the back

This wide through-spindle is perfect for oil pipe machining and other long shaft applications.



Optional air chuck in front

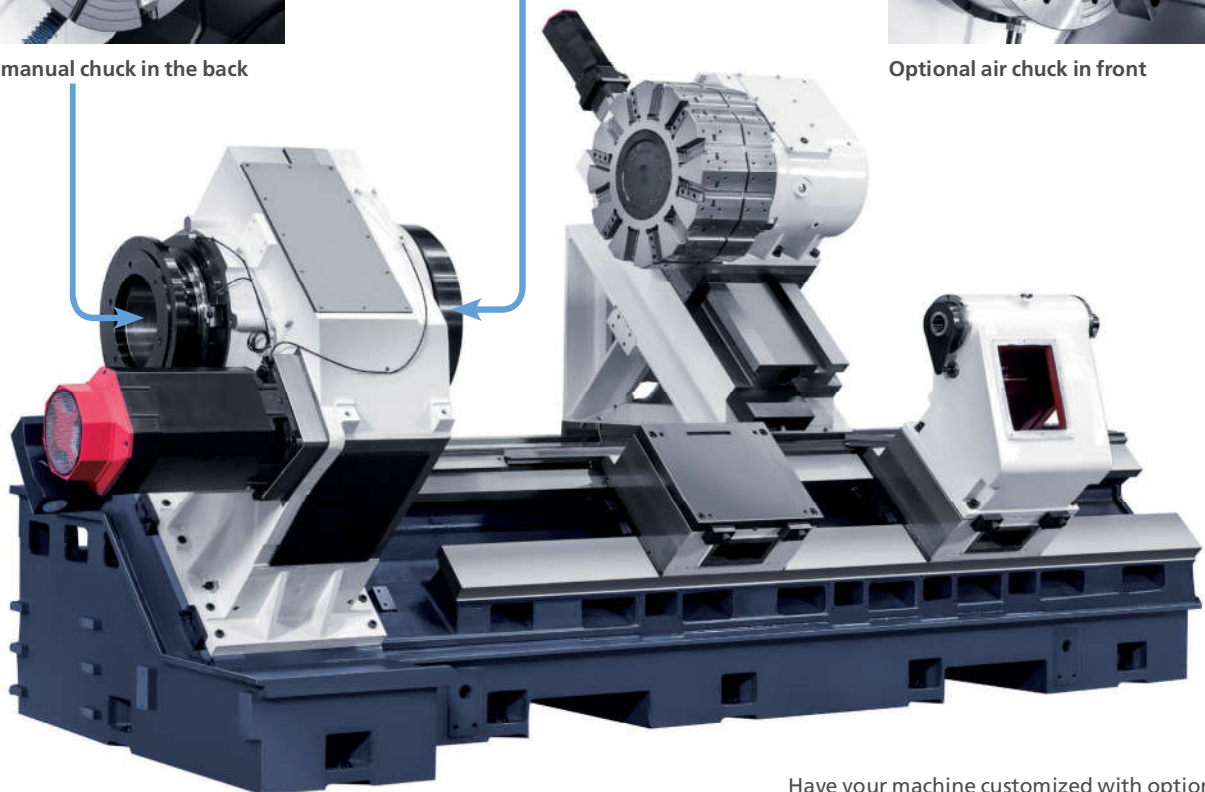

Have your machine customized with optional air chucks for even higher stability and precision.


* Unit: mm(inch)

	Hi-TECH 550BB	Hi-TECH 700BB	Hi-TECH 700BB ⁺	Hi-TECH 850BB	Hi-TECH 850BB ⁺
Maximum Turning Diameter	$\text{\O}590(\text{\O}23.23\text{'})$	$\text{\O}680(\text{\O}26.77\text{'})$	$\text{\O}680(\text{\O}26.77\text{'})$	$\text{\O}920(\text{\O}36.22\text{'})$	$\text{\O}920(\text{\O}36.22\text{'})$
Chuck Size(Opt.)	$\text{\O}470(\text{\O}18.5\text{'})$	$\text{\O}470(\text{\O}18.5\text{'})$	$\text{\O}630(\text{\O}24.8\text{'})$	$\text{\O}630(\text{\O}24.8\text{'})$	$\text{\O}850(\text{\O}33.47\text{'})$
Through Spindle Hole Diameter	$\text{\O}195(\text{\O}7.68\text{'})$	$\text{\O}185(\text{\O}7.28\text{'})$	$\text{\O}300(\text{\O}11.81\text{'})$	$\text{\O}300(\text{\O}11.81\text{'})$	$\text{\O}375(\text{\O}14.75\text{'})$
Maximum Bar Size	$\text{\O}190(\text{\O}7.48\text{'})$	$\text{\O}180(\text{\O}7.08\text{'})$	$\text{\O}295(\text{\O}11.61\text{'})$	$\text{\O}295(\text{\O}11.61\text{'})$	$\text{\O}370(\text{\O}14.56\text{'})$

High Performance Spindle

This performance spindle delivers high torque at low speed, while the internal gear array provides efficient braking power, along with the built-in high-performance brake. The bearings inside the spindle assembly are oil cooled, with Hwacheon's unique Oil Jet Cooling technology; and the gearbox temperature is efficiently regulated with the circulating oil coolant, for precision results at all time. This spindle system is specially effective for large size, heavy duty jobs.

- Hi-TECH 550BB: Grease Type
- Hi-TECH 700BB, 700BB+: Oil-Jet Type
- Hi-TECH 850BB, 850BB+: Oil-Jet Type

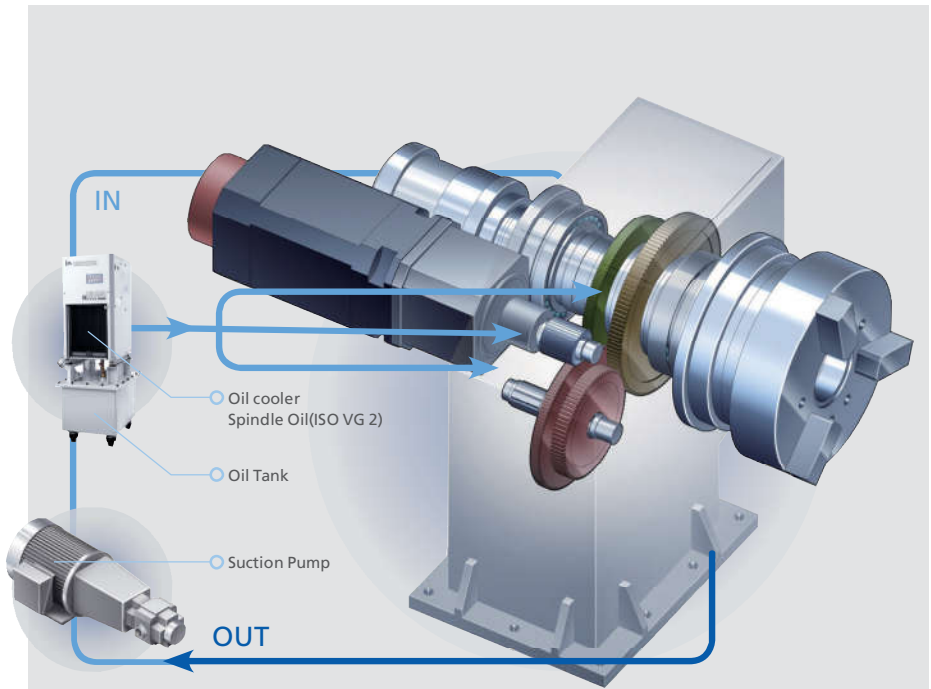


High Performance Turret (Hi-TECH 850BB/BB+)

Y axis can be added per your request; and the entire process from turning to milling can be performed with a single setting. This helps maintain your quality, and eliminates down time in between jobs by getting rid of unnecessary loading and unloading of work pieces. It's like having two machines in one, which means you'll be twice as productive.


Max. Long Boring Bar Size (D x L)


- Hi-TECH 550BB: Ø60 x 600mm
- Std.: Wide Type Turret Disk
- Hi-TECH 700BB/700BB+: Ø60 x 600mm
- Std.: Wide Type Turret Disk
- Hi-TECH 850BB/850BB+: Ø80 x 800mm
- Std.: Wide Type Turret Disk

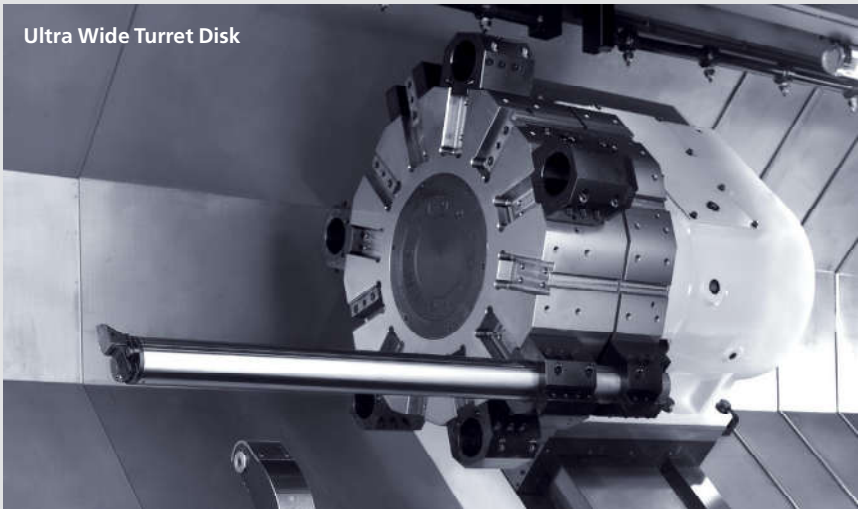

Multitasking

Run by a powerful AC spindle motor, the turnmill can accurately axis-index the spindle to perfectly mill, tap, or drill. Different types of milling or turning job can be performed with a single chucking when the optional Y axis is installed.

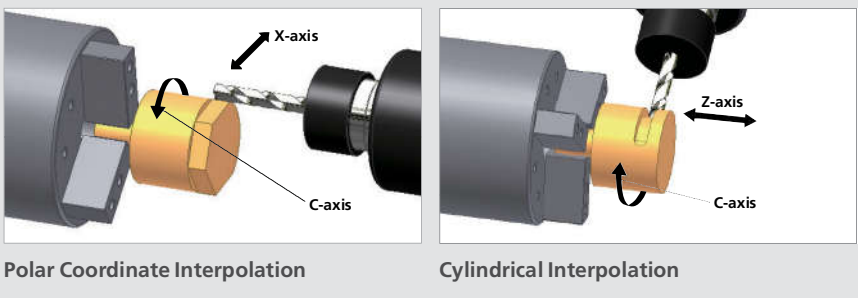

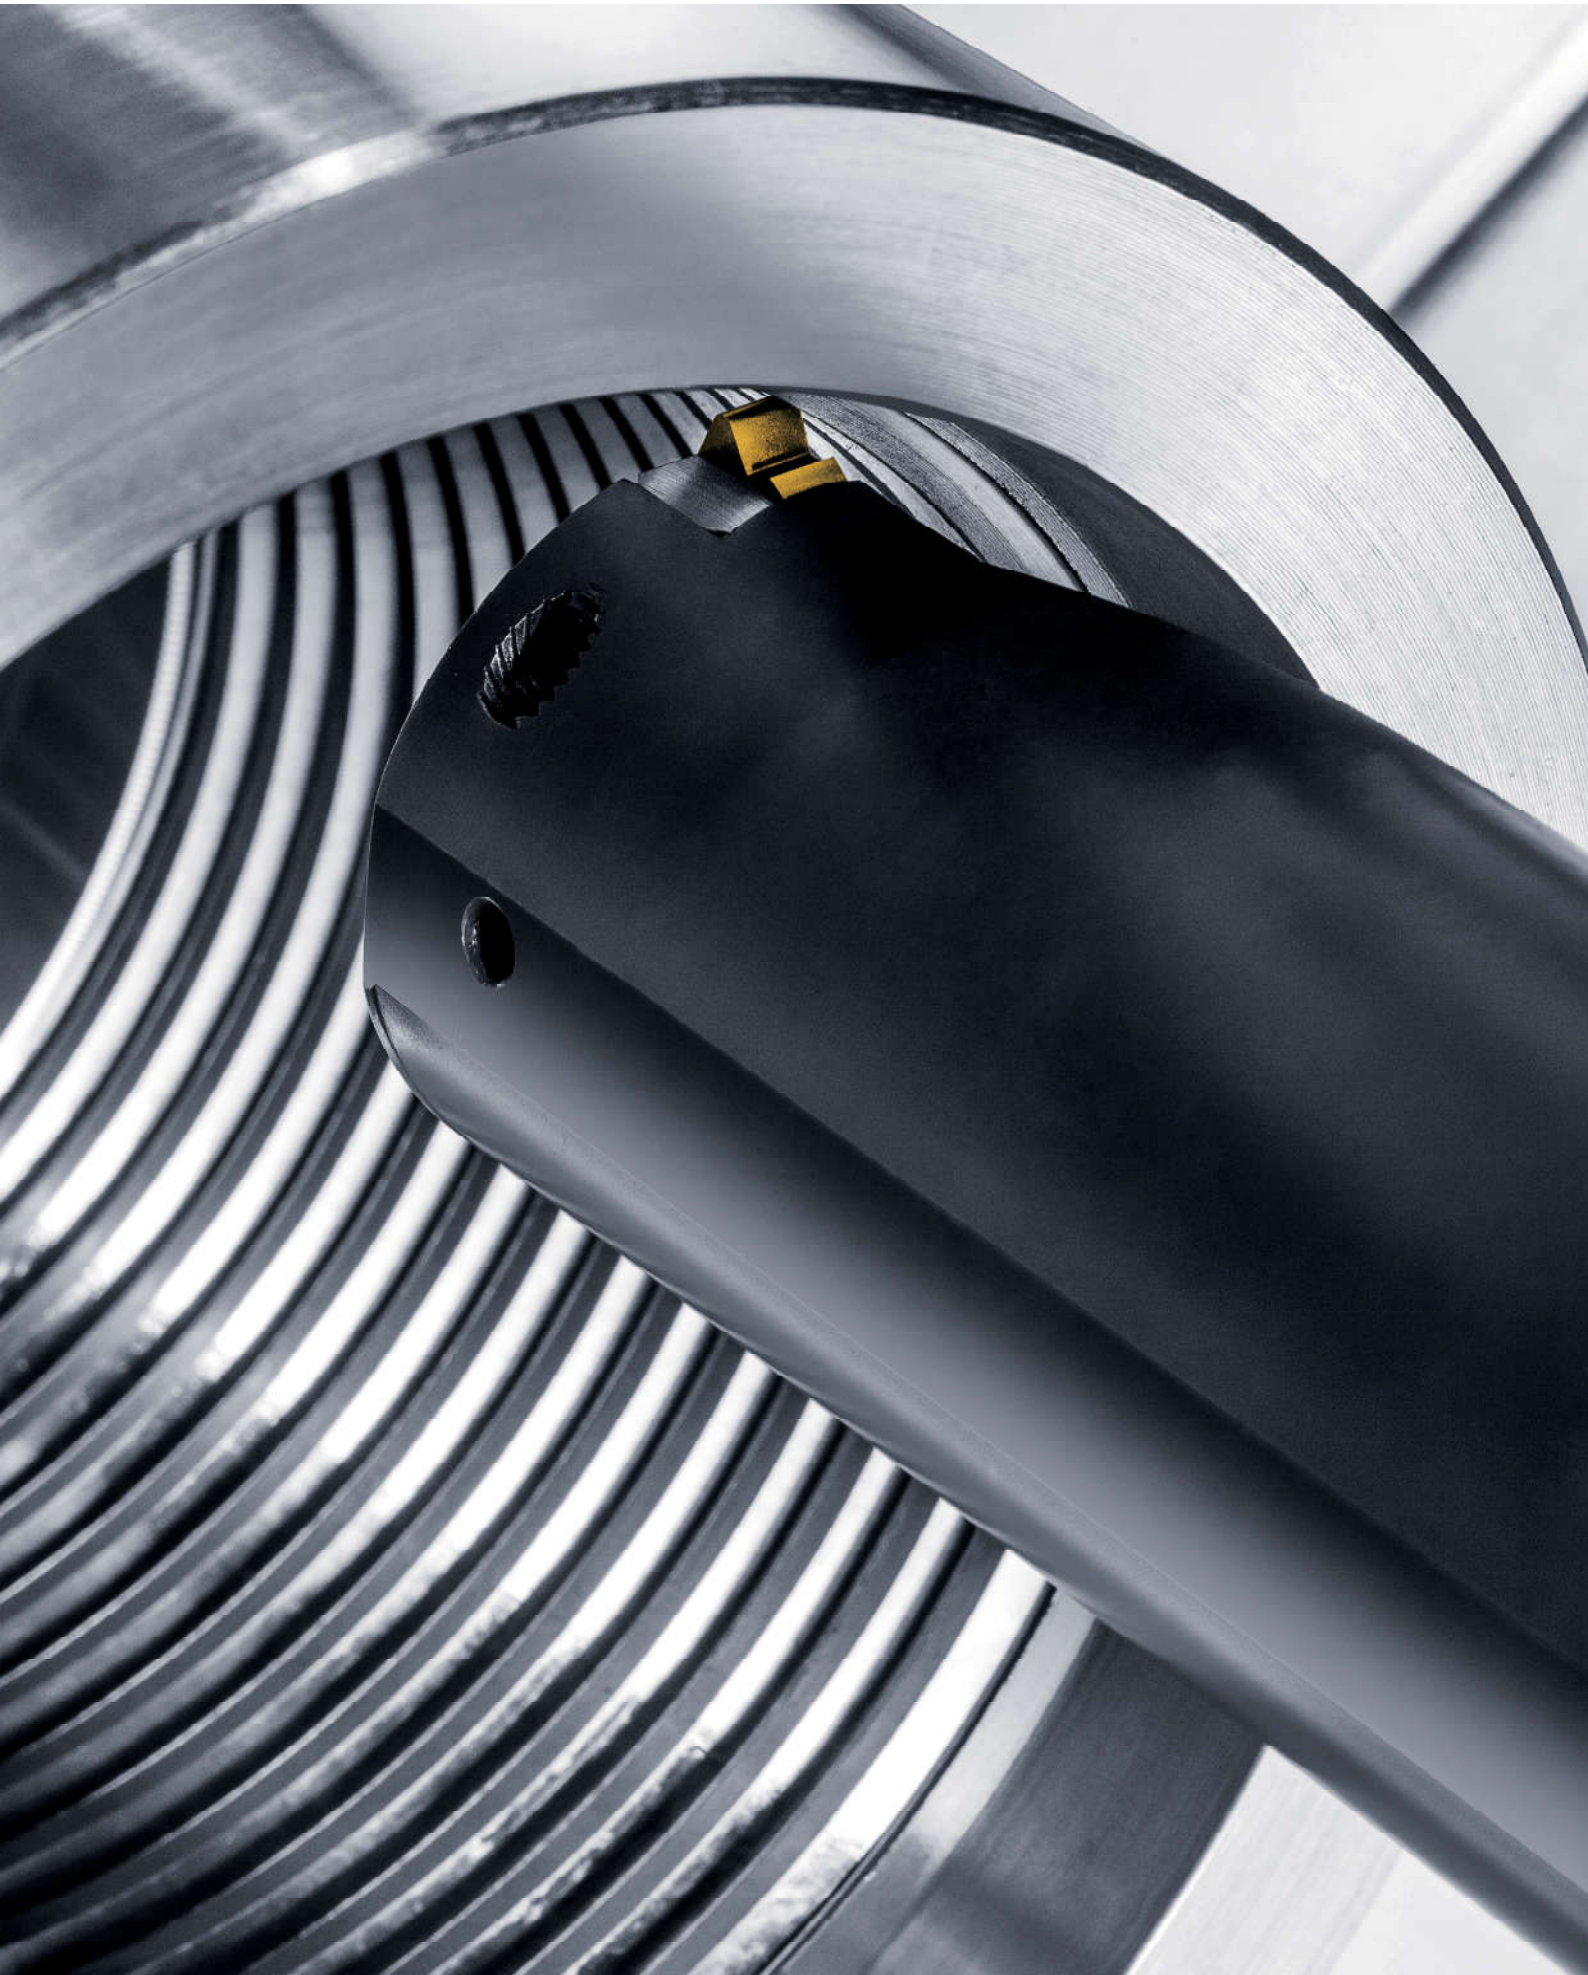

USER FRIENDLY DESIGN, A WIDE RANGE OF OPTIONAL FEATURES

The BB-series turning centers are designed with end users in mind. Its user-friendly machine design and a variety of supplementary features ensure a stronger, faster and more precise machining performance.

Accessibility Translates to Productivity.

The side cover is designed to let hoist lifted large work pieces to be loaded and unloaded from the rear of the spindle, to maximize accessibility.



L-HTLD: Hwacheon Lathe Tool Load Detect System (Option)



The Hwacheon Lathe Tool Load Detect System constantly detects and diagnoses the tool load under a process to prevent tool wear and damage, and to keep your machine and tools in optimal shape.

Load Detection Limit 1

Alarm + Feed Hold

> When the LIMIT 1 Alarm sounds, the system holds the feed and the machine goes into stand-by.

Load Detection Limit 2

Alarm + Machine Stop

> When the LIMIT 2 Alarm sounds, the system stops the machine, and must be reset to operate it.

Thread Repair Function

The Thread Repair Function on the Manual Guide I screen gives you an option to repair a stripped thread.

Main Cover Pocket



Rear Chuck Cover




Best steady rest performance in its class(Optional)




Product Data : Hi-TECH 550BB

* Unit: mm(inch)

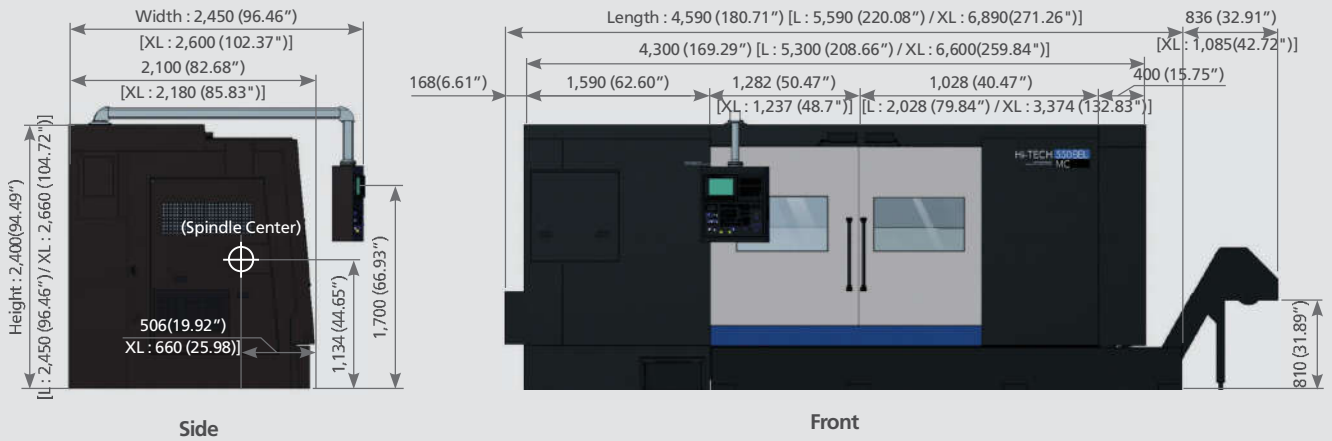


Spindle Power-Torque Diagram

Hi-TECH 550BB (Main Spindle)

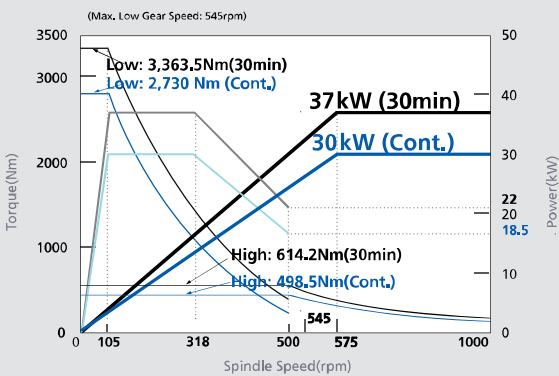


Hi-TECH 550BB (Turnmill)

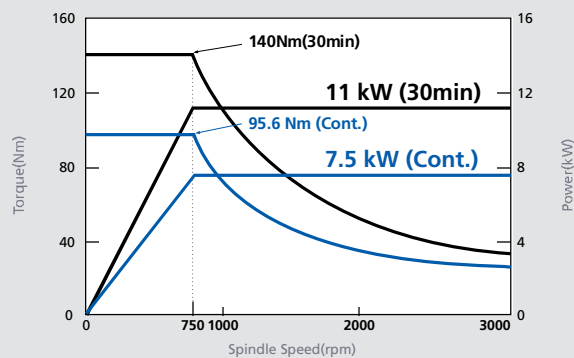


Product Data : Hi-TECH 700BB/700BB*

* Unit: mm(inch)

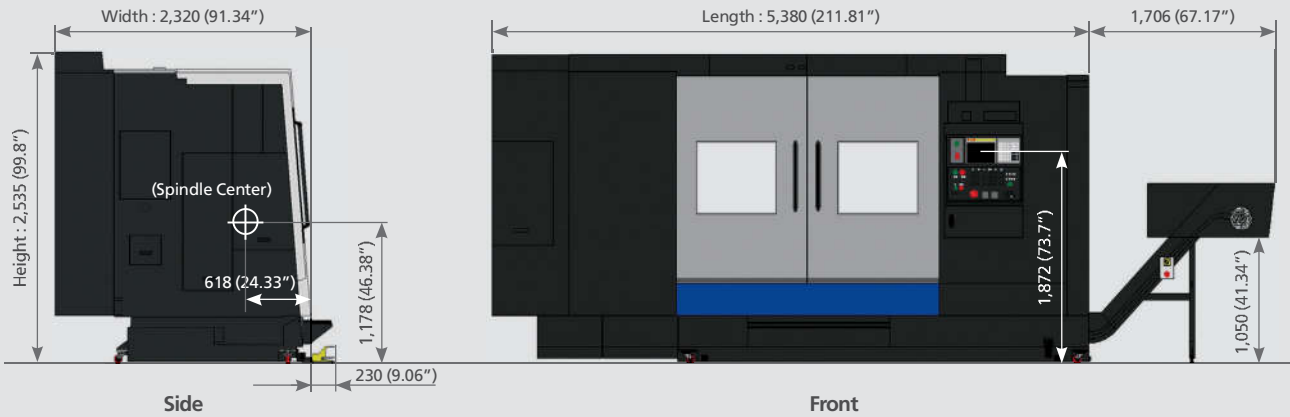


Spindle Power-Torque Diagram


Hi-TECH 700BB (Main Spindle)

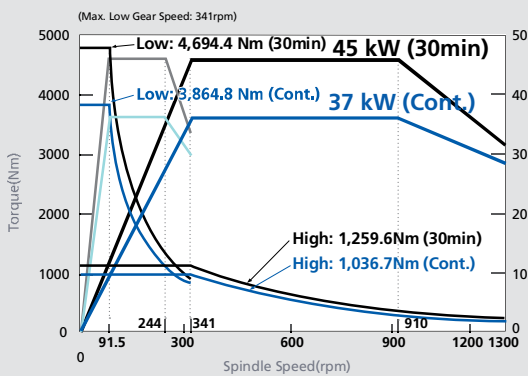

Hi-TECH 700BB+ (Main Spindle)

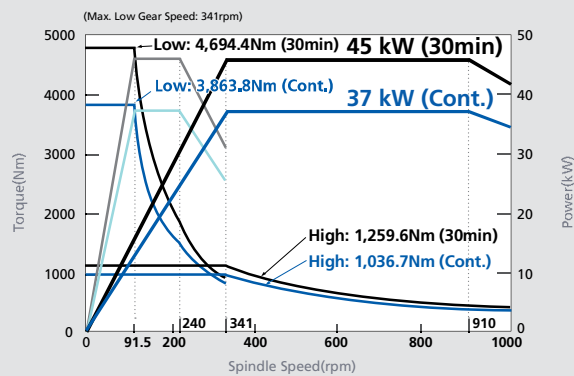


Hi-TECH 700BB/Hi-TECH 700BB* (Turnmill)

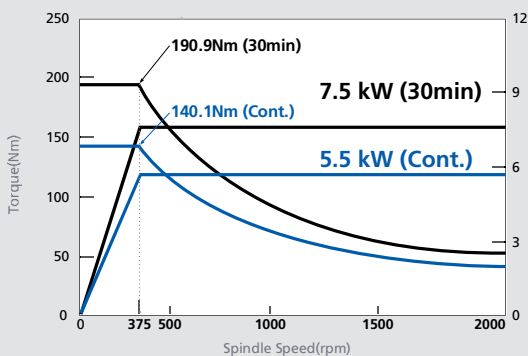


Product Data : Hi-TECH 850BB/850BB+

* Unit: mm(inch)

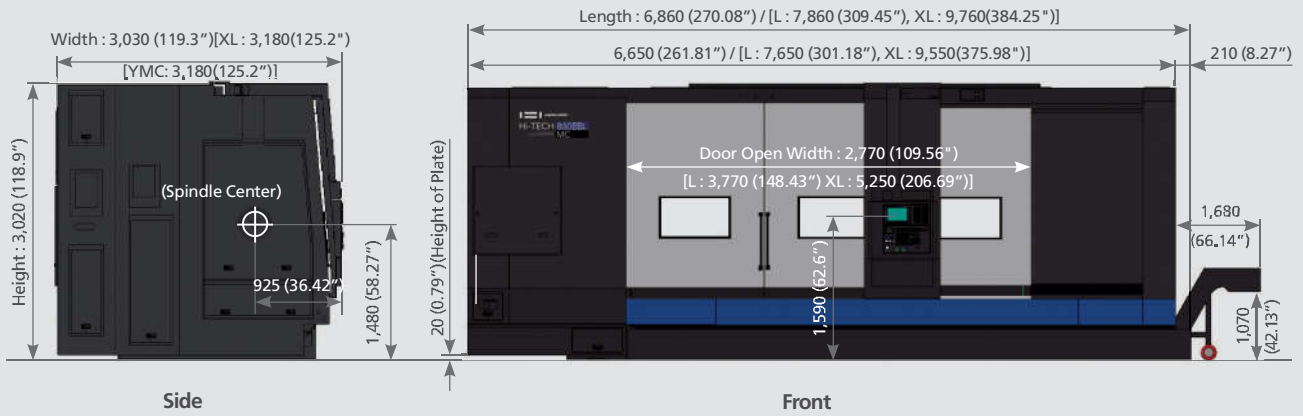


Spindle Power-Torque Diagram


Hi-TECH 850BB (Main Spindle)

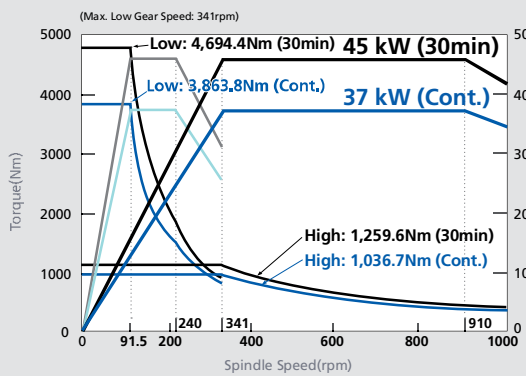

Hi-TECH 850BB+ (Main Spindle)

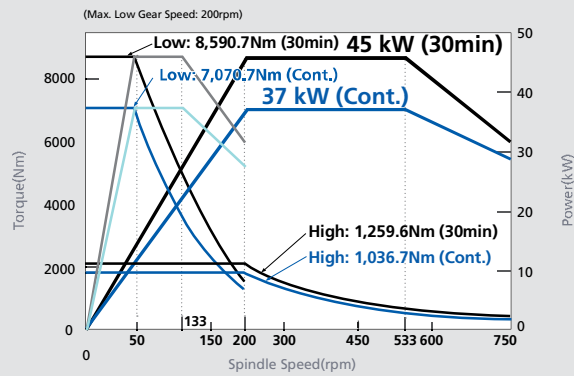


Hi-TECH 850BB/Hi-TECH 850BB+ (Turnmill)

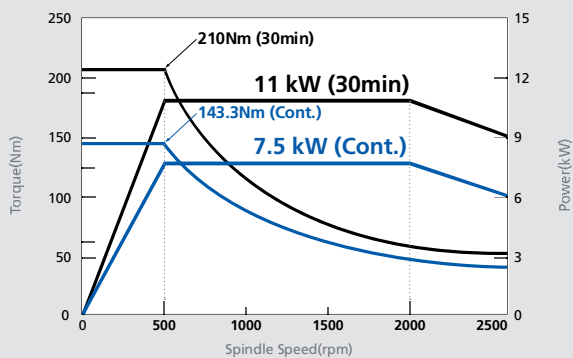


Interference Diagram : Hi-TECH 550BB, Hi-TECH 700BB / 700BB+

※Unit : mm(inch)


Hi-TECH 500BB STD

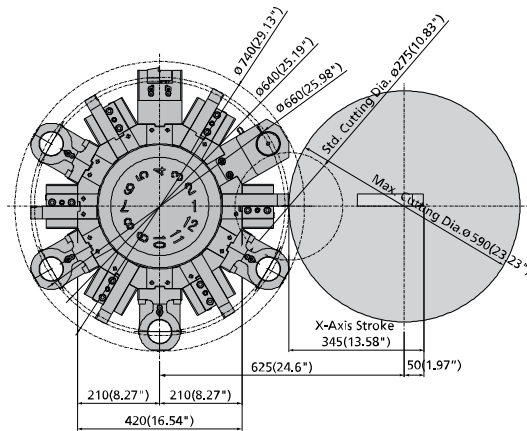


Hi-TECH 500BB MC

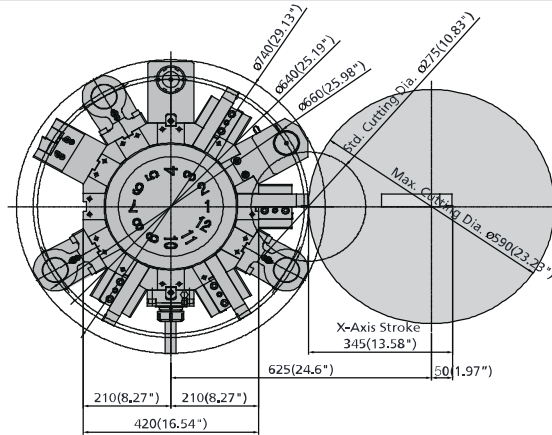

Hi-TECH 700BB / 700BB+ STD

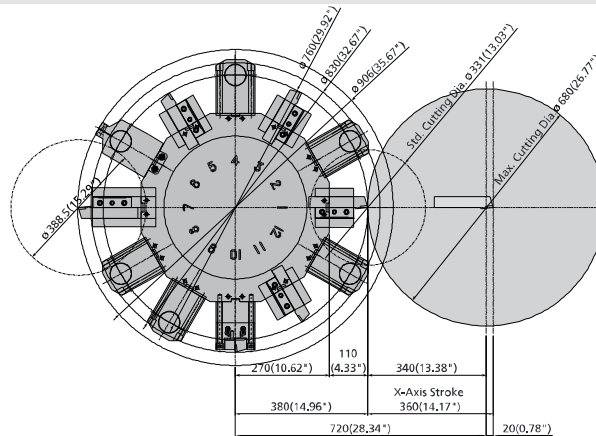


Hi-TECH 700BB / 700BB+ MC

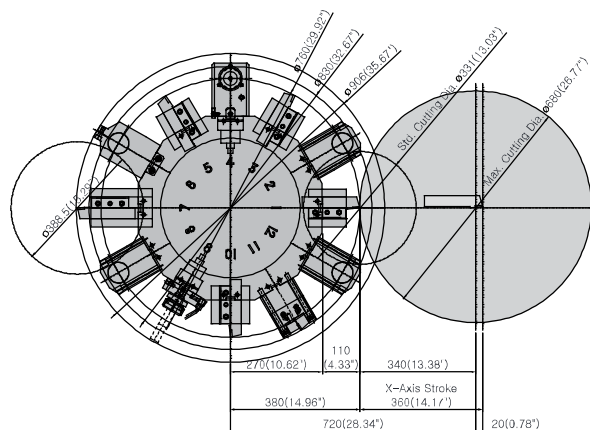


Interference Diagram : Hi-TECH 850BB, Hi-TECH 850BB+

※Unit : mm(inch)


Standard Tool Interference

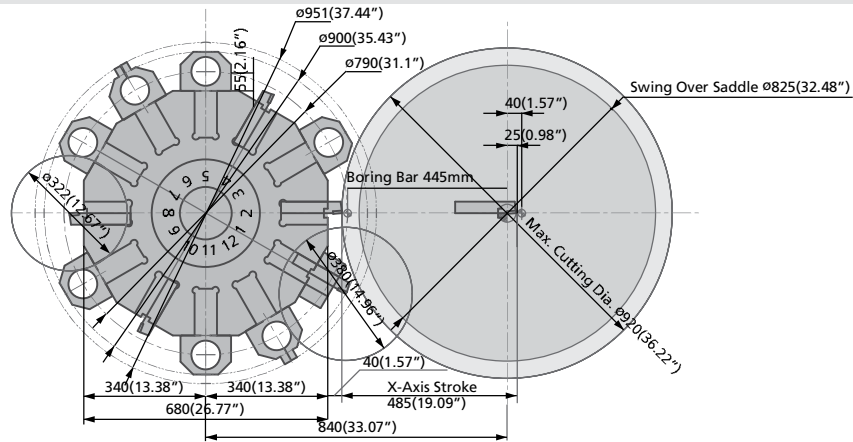


MC Tool Interference

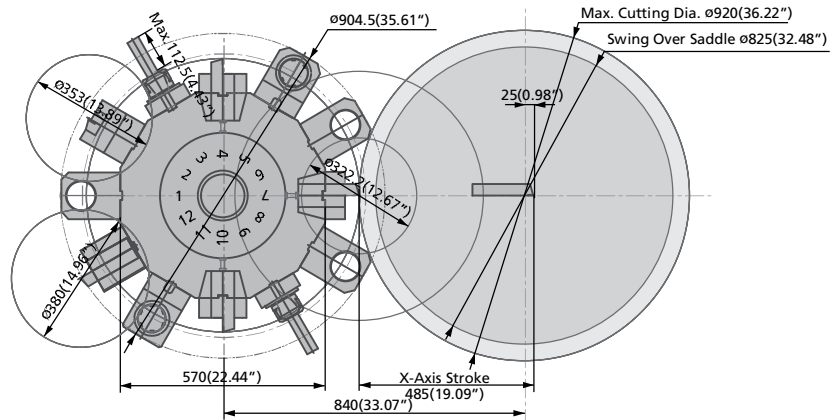

YMC Radial Turnmill Holder

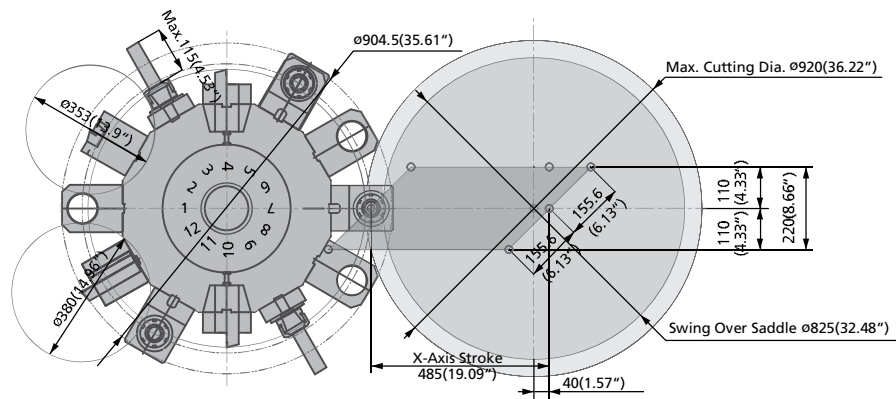


YMC Axial Turnmill Holder

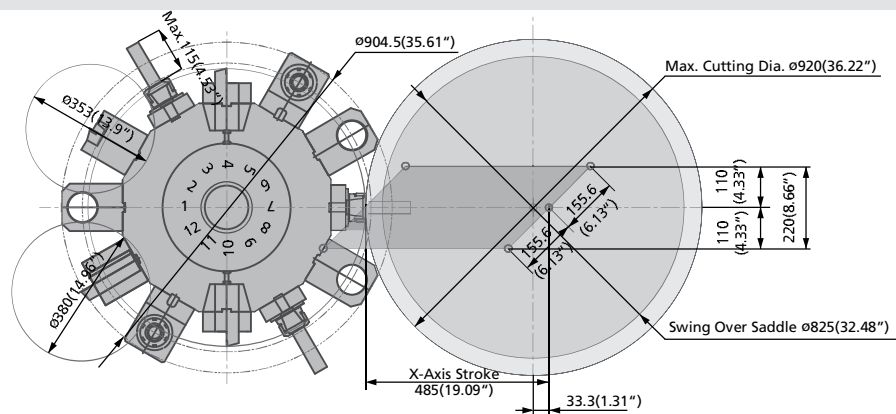


Moving Range

Hi-TECH 550BB


O.D Holder (Std./MC)

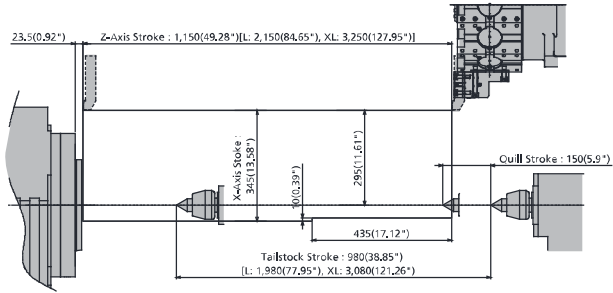


I.D Holder (Std./MC)

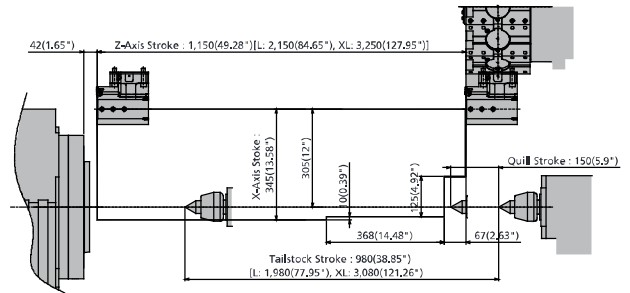

Radial Turnmill Holder

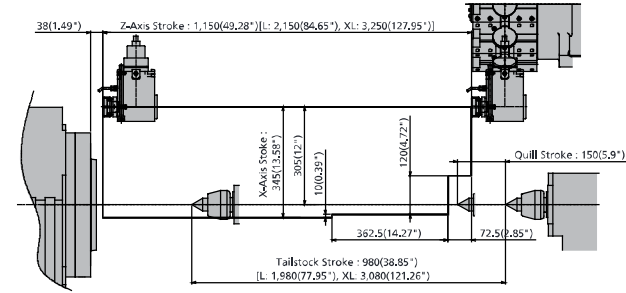


Axial Turnmill Holder

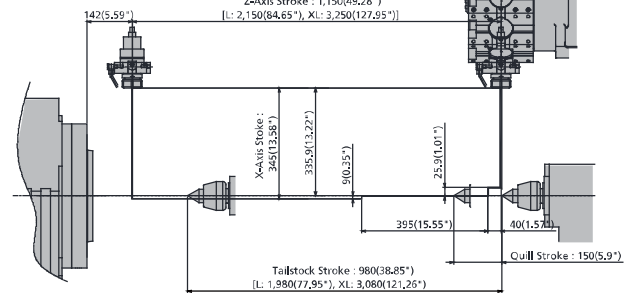


Hi-TECH 700BB / 700BB*


O.D Holder (Std. / MC)

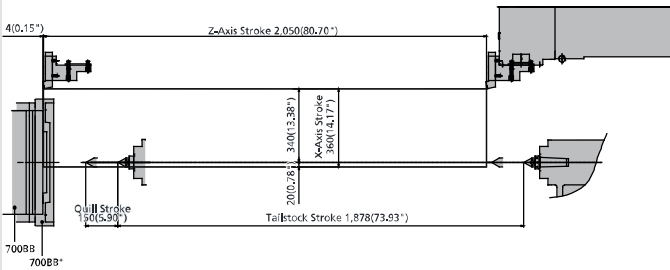


I.D Holder (Std. / MC)

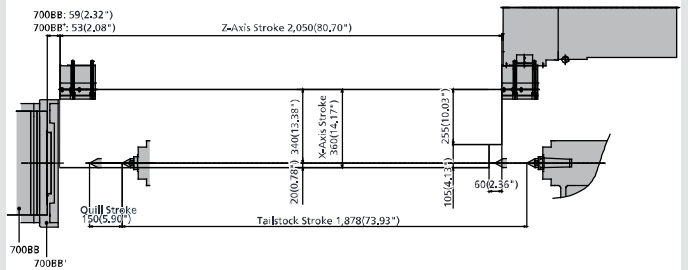

Radial Turnmill Holder

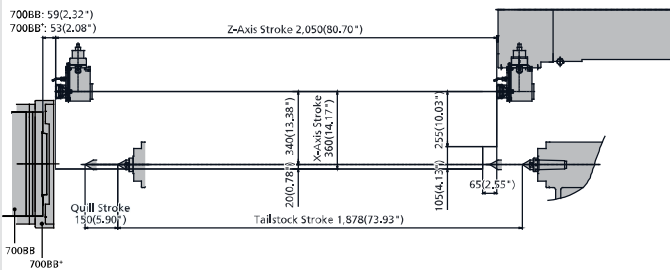


Axial Turnmill Holder

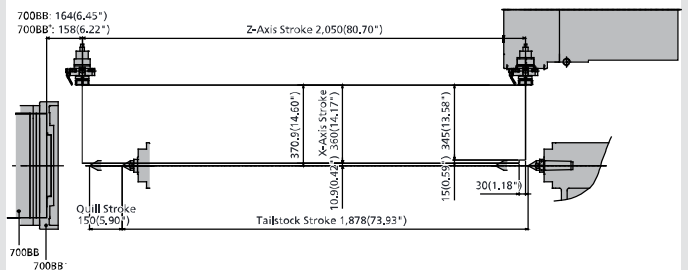


Moving Range

Hi-TECH 850BB / 850BB+


OD Holder (Std.)

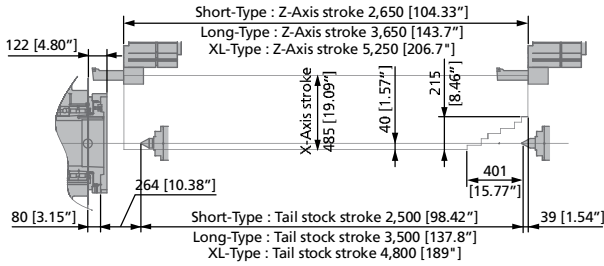


ID Holder (Std.)

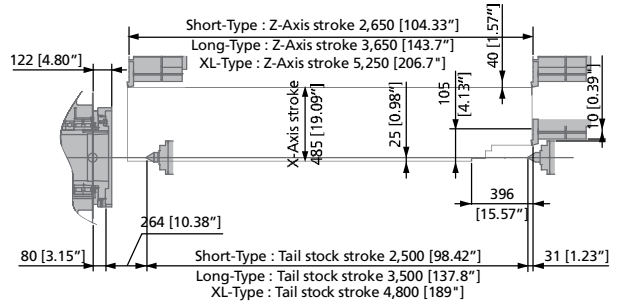


OD Holder (MC)

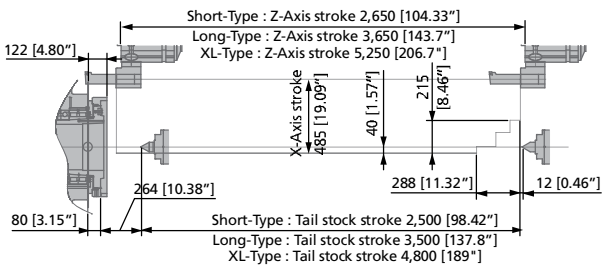


ID Holder (MC)

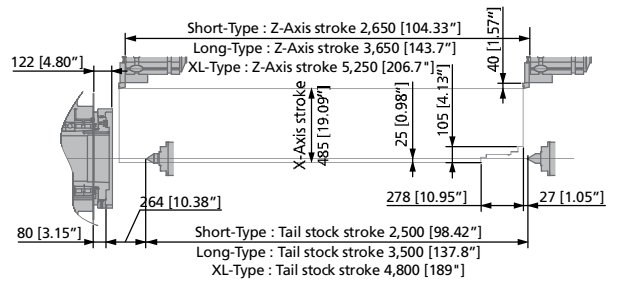


Radial Turnmill Holder

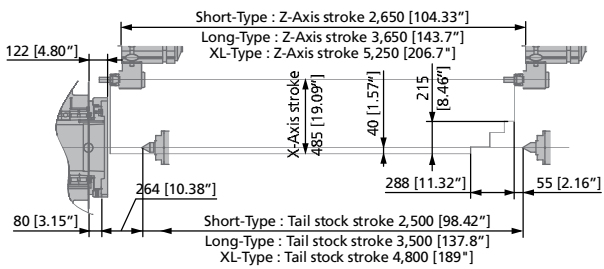


Axial Turnmill Holder

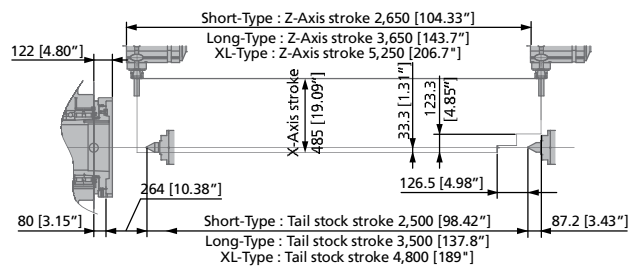




Extend O.D.

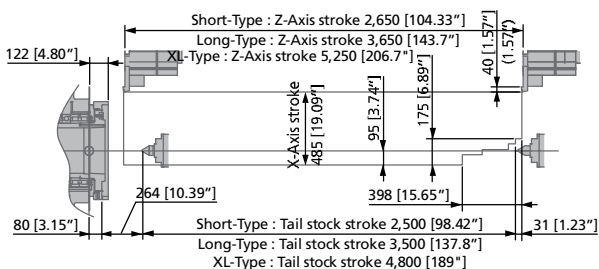

Long Boring Bar

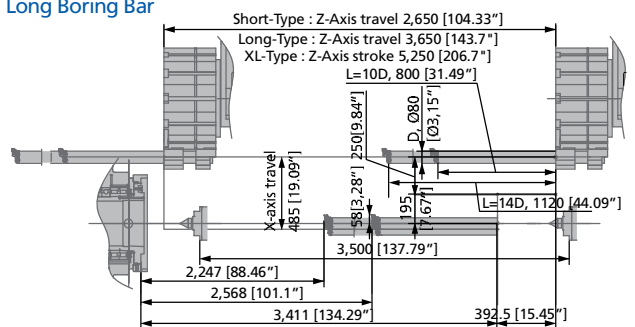

Product Configuration

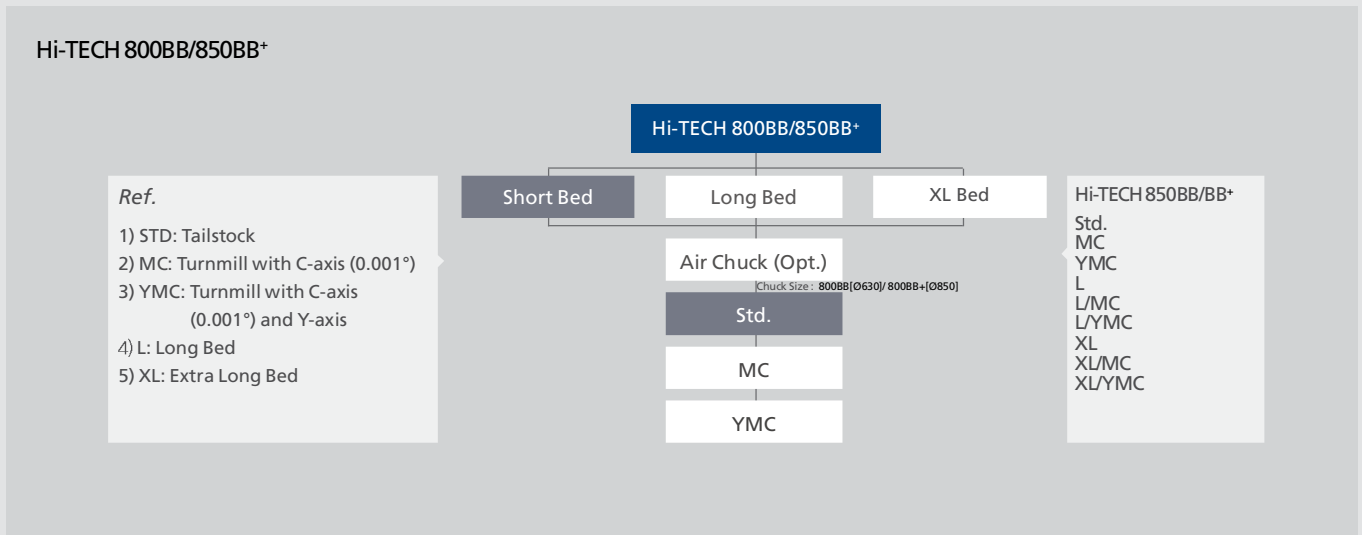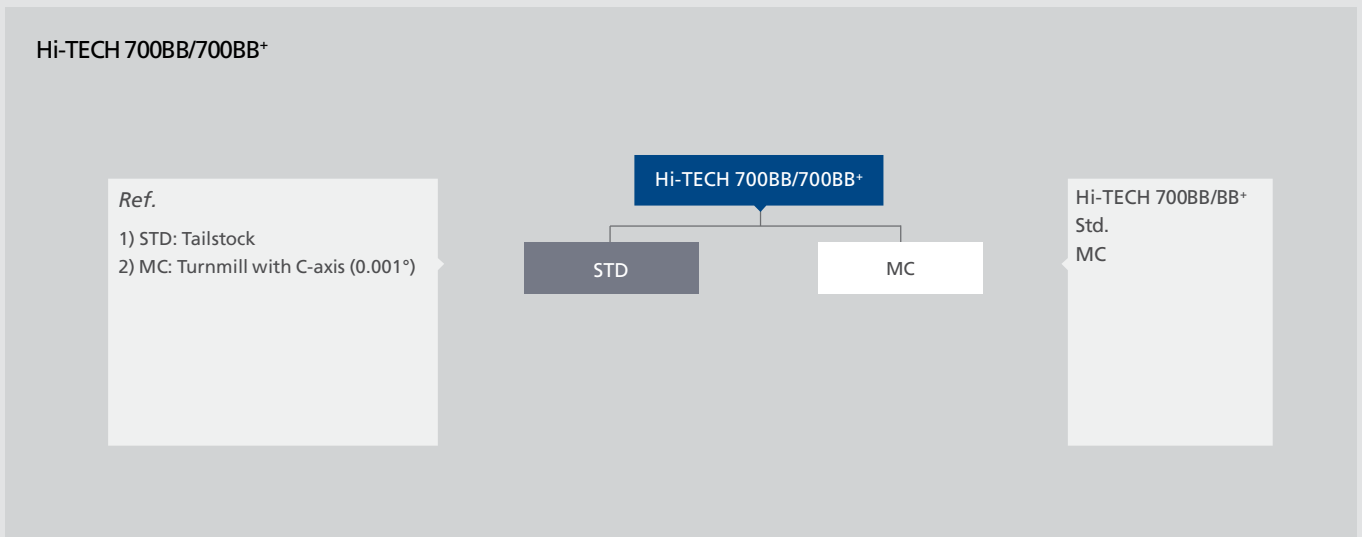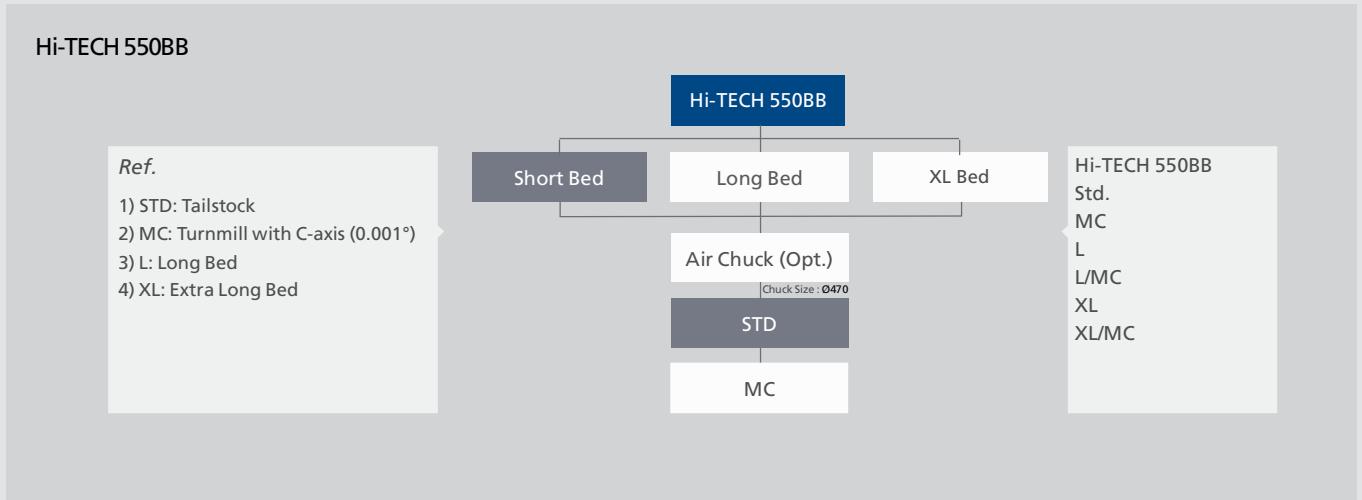

Standard and Optional Product Components : Hi-TECH 550BB

Standard Accessories		Optional Accessories	
• Built in tailstock (only FANUC)	• Tool Holder for Long Boring Bar	• Air Blower	• Tool Life Management
• Coolant System	• Tooling System	• Air Gun	• Tool Presetter (Automatic)
• Door Interlock	• Tool Kit & Box	• Arbitrary Speed Threading	• Tool & Work Counter
• Foot Switch	• Wide type turret disk	• Auto Door	- External/ Internal
• Hydraulic Unit, 40Kg/cm ²	• Work Light	• Bar Feeder Interface	• Transformer
• Leveling Bolt & Plate	• 10.4" Color LCD	• Chip Conveyor & Box (Side Type)	• Turnmill Function Including
• Manual Guide i		• Coolant Gun	C-axis (0.001°)
• Operation Manual & Parts List		• High Pressure Coolant System	• Turnmill Holder (Axial/ Radial)
• Signal Lamp with 2 Colors (R, G)		- 6bar/ 15bar/ 70bar	• Turnmill Spindle Motor Upgrade
• Standard Turret 12 stations		• Linear Scale (X/ Z)	- 11/7.5kW
• Tailstock, MT#5		• Manual Chuck, 20"	• U-Drill Holder
- Tailstock Body Program		• NC Cooler	• Lathe-Hwacheon Tool Load Detect
- Tailstock Quill Program		• Oil Skimmer	(L-HTLD)
• Thread Repair Function		• Signal Lamp with 3 Colors (R, G, Y)	• 15" Color LCD (only FANUC)
		• Steady Rest Base Set	
		• Steady Rest Set, KHAN/ SMW	

Standard and Optional Product Components : Hi-TECH 700BB, Hi-TECH 700BB⁺■ Hi-TECH 700BB ■ Hi-TECH 700BB⁺

Standard Accessories		Optional Accessories	
• Coolant System	• Tool Holder for Long Boring Bar	• Air Blower	• Tool Life Management
• Door Interlock	• Tooling System	• Air Chuck Including Pneumatics	• Tool Presetter (Automatic)
• Foot Switch	• Tool Kit & Box	Control System, SCHUNK/ SMW	• Transformer
• Hydraulic Unit	• Work Light	• Air Gun	• Turnmill Function Including
• Leveling Bolt & Plate	• Wide type turret disk	• Arbitrary Speed Threading	C-axis (0.001°)
• Lubrication System	• 10.4" Color LCD	• Chip Conveyor & Box (Side Type)	• Turnmill Holder (Axial/ Radial)
• Manual Guide i		• Coolant Gun	• U-Drill Holder
• Operation Manual & Parts list		• High Pressure Coolant System	• Lathe-Hwacheon Tool Load Detect
• Signal Lamp with 2 Colors (R, G)		- 6bar/ 15bar/ 70bar	(L-HTLD)
• Spindle Air Curtain		• Manual Chuck, 20"	• 15" Color LCD (only FANUC)
• Standard Turret, 12 pos.		• Manual Chuck, 24"	
• Steady Rest Base Set		• NC Cooler	
• Tailstock, MT#5		• Oil Skimmer	
- Tailstock Body Program		• Signal Lamp with 3 Colors (R, G, Y)	
- Tailstock Quill Program		• Steady Rest Base Set	
• Thread Repair Function		• Steady Rest Set, KHAN/ SMW	

Standard and Optional Product Components : Hi-TECH 850BB, Hi-TECH 850BB⁺■ Hi-TECH 850BB ■ Hi-TECH 850BB⁺

Standard Accessories		Optional Accessories	
• Door Interlock	• Tool Holder for Long Boring Bar	• Air Blower	• Steady Rest Set, KHAN/ SMW
• Foot Switch	• Tooling System	• Air Chuck Including Pneumatics	• Tool Life Management
• High Pressure Coolant Pump, 6bar	• Tool Kit & Box	Control System, SCHUNK/ SMW	• Tool Presetter (Automatic)
• Hydraulic Unit	• Wide Type Turret Disk	• Air Gun	• Tool & Work Counter
• Leveling Bolt & Plate	• Work Light	• Arbitrary Speed Threading	- External/ Internal
• Lubrication System	• 10.4" Color LCD	• Chip Conveyor & Box (Side Type)	• Transformer
• Manual Guide i		• Coolant Gun	• Turnmill Function Including
• Operation Manual & Parts List		• Function of Y-axis (±110mm)	C-axis (0.001°)
• Signal Lamp with 2 Colors (R, G)		• High Pressure System	• Turnmill Holder (Axial/ Radial)
• Spindle Air Curtain		- 15bar/ 30bar/ 70bar	• U-Drill Holder
• Spindle Cooling System		• Linear Scale (X/ Z/ Y)	• Lathe-Hwacheon Tool Load Detect
• Standard Turret, 12 pos.		• Manual Chuck, 24"	(L-HTLD)
• Tailstock, MT#6		• Manual Chuck, 28"	• 15" Color LCD (only FANUC)
- Tailstock Body Program		• NC Cooler	
- Tailstock Quill Program		• Oil Skimmer	
		• Signal Lamp with 3 Colors (R, G, Y)	
		• Steady Rest Base Set	

Machine Specifications

ITEM	Hi-TECH 550BB						
	550BB	550BB/MC	550BBL	550BBL/MC	500BBXL	500BBXL/MC	
Capacity							
Swing over Bed	mm (inch)	Ø800 (Ø31.50")					
Max. Cutting Diameter	mm (inch)	Ø590 (Ø23.23")					
Standard Cutting Diameter	mm (inch)	Ø275 (Ø10.83")					
Chuck Size (Opt.)	mm (inch)	Air chuck Ø470 (Ø18.5")					
Spindle							
Type of Spindle Nose	ASA	A2-15					
Max. Spindle Speed	rpm	1,500					
Through Spindle Hole Diameter	mm (inch)	Ø195 (Ø7.68")					
Max. Bar Size	mm (inch)	Ø190 (Ø7.48")					
Spindle Bearing Inner Diameter	mm (inch)	Ø240 (Ø9.45")					
Spindle Motor	kW (HP)	37/30 (50/40)					
Turret							
Number of Tool Station	ea	12					
Tool Size (OD x ID)	mm (inch)	□32 x Ø60 (□1.25" x Ø2.5")					
Turret Indexing Time	sec / step	0.2					
Axes							
Rapid Speed (X / Z)	m/min (ipm)	20/24		20/20		20/10	
Max. Stroke (X / Z)	mm (inch)	345/1,150 (13.58"/45.28")		345/2,150 (13.58"/84.65")		345/3,250 (13.58"/127.95")	
Feed Motor (X / Z)	kW (HP)	4/4(5.4/5.5)		4/7(5.4/9.5)		4/7(5.4/9.5)	
Tailstock							
Quill Dia.	mm (inch)	Ø120 (Ø4.72")					
Quill Stroke	mm (inch)	150 (5.91")					
Quill Taper	MT	# 5					
Turnmill (Opt.)							
Spindle Motor	kW (HP)	-	7.5/5.5 (10/7.5)	-	7.5/5.5 (10/7.5)	-	7.5/5.5 (10/7.5)
Max. Spindle Speed	rpm	-	4,000	-	4,000	-	4,000
Max. Drill / Collet Size	mm (inch)	-	Ø32(Ø1.26") /M20	-	Ø32(Ø1.26") /M20	-	Ø32(Ø1.26") /M20
Min. Index Angle	° (deg)	-	0.001°	-	0.001°	-	0.001°
Tank Capacity							
Lubrication	ℓ (gal)	12(3.17)					
Hydraulic	ℓ (gal)	50(13.21)					
Coolant	ℓ (gal)	250(66)		380(100)		580(153)	
Power Sources							
Electrical Power Supply	kVA	75					
Dimension							
Height	mm (inch)	2,400 (94.49")		2,450 (96.46")		2,660 (104.73")	
Floor Space (L x W)	mm (inch)	4,590 x 2,450 (180.71" x 96.46")		5,590 x 2,450 (220.08" x 96.46")		6,890 x 2,600 (271.26" x 102.36")	
Weight	kg _f (lb _f)	10,000 (22,046)	10,500 (23,148)	12,500 (27,558)	13,000 (28,660)	16,000 (35,274)	16,500 (36,376)
NC Controller	Fanuc 0i-TF (Opt.: Fanuc 31i-B)						

Machine Specifications

ITEM		Hi-TECH 700BB/700BB ⁺			
		700BB	700BB/MC	700BB ⁺	700BB ⁺ /MC
Capacity					
Swing over Bed	mm (inch)	Ø900 (Ø35.43")			
Max. Cutting Diameter	mm (inch)	Ø680 (Ø26.77")			
Standard Cutting Diameter	mm (inch)	Ø331 (Ø13.03")			
Chuck Size (Opt.)	mm (inch)	Air chuck Ø470 (Ø18.5")		Air chuck Ø630 (Ø24.8")	
Spindle					
Type of Spindle Nose	ASA	A2-15		A2-20	
Max. Spindle Speed	rpm	1,300		1,000	
Through Spindle Hole Diameter	mm (inch)	Ø185 (Ø7.28")		Ø300 (Ø11.81")	
Max. Bar Size	mm (inch)	Ø180 (Ø7.08")		Ø295 (Ø11.61")	
Spindle Bearing Inner Diameter	mm (inch)	Ø240 (Ø9.45")		Ø360 (Ø14.17")	
Spindle Motor	kW (HP)	45/37 (60/50)		45/37 (60/50)	
Turret					
Number of Tool Station	ea	12			
Tool Size (OD x ID)	mm (inch)	□32 x Ø60 (□1.25" x Ø2.5")			
Turret Indexing Time	sec / step	0.4			
Axes					
Rapid Speed (X / Z)	m/min (ipm)	18/18			
Max. Stroke (X / Z)	mm (inch)	360/2,050 (14.17"/80.7")			
Feed Motor (X / Z)	kW (HP)	6/6 (8/8)			
Tailstock					
Quill Dia.	mm (inch)	Ø150 (Ø5.9")			
Quill Stroke	mm (inch)	150 (5.91")			
Quill Taper	MT	# 5			
Turnmill (Opt.)					
Spindle Motor	kW (HP)	-	7.5/5.5 (10/7.5)	-	7.5/5.5 (10/7.5)
Max. Spindle Speed	rpm	-	2,000	-	2,000
Max. Drill / Collet Size	mm (inch)	-	Ø32(Ø1.26") / M20	-	Ø50 (Ø2") / M24
Min. Index Angle	° (deg)	-	0.001°	-	0.001°
Tank Capacity					
Lubrication	ℓ (gal)	12 (3.17)			
Hydraulic	ℓ (gal)	50 (13.21)			
Coolant	ℓ (gal)	300 (79)			
Power Sources					
Electrical Power Supply	kVA	75			
Dimension					
Height	mm (inch)	2,535 (99.8")			
Floor Space (L x W)	mm (inch)	5,380x2,320 (211.9"x91.34")			
Weight	kg _r (lb _p)	15,500 (34,172)	15,600 (34,392)	15,850 (34,943)	15,950 (35,164)
NC Controller		Fanuc Oi-TF (Opt.: Fanuc 31i-B)			

Machine Specifications

ITEM	Hi-TECH 850BB/850BB*												
	850BB Std./MC	850BB /YMC	850BBL Std./MC	850BBL /YMC	850BBXL Std./MC	850BBXL /YMC	850BB* Std./MC	850BB* /YMC	850BB*L Std./MC	850BB*L /YMC	850BB*XL Std./MC	850BB*XL /YMC	
Capacity													
Swing over Bed	mm (inch)	Ø1,050 (Ø41.34")											
Max. Cutting Diameter (ØD x L)	mm (inch)	Ø920 (Ø36.22") [385 (15.16")]											
Standard Cutting Diameter	mm (inch)	Ø380 (Ø14.96")											
Chuck Size (Opt.)	mm (inch)	Air Chuck Ø630 (Ø24.8")						Air Chuck Ø850 (Ø33.5")					
Spindle													
Type of Spindle Nose	ASA	A2-20											
Max. Spindle Speed	rpm	1,000						750					
Through Spindle Hole Diameter	mm (inch)	Ø300 (Ø11.81")						Ø375 (Ø14.76")					
Max. Bar Size	mm (inch)	Ø295 (Ø11.61")						Ø370 (Ø14.56")					
Spindle Bearing Inner Diameter	mm (inch)	Ø360 (Ø14.17")						Ø440 (Ø17.32")					
Spindle Motor	kW (HP)	45 / 37 (60 / 50)											
Turret													
Number of Tool Station	ea	12											
Tool Size (OD x ID)	mm (inch)	□32 x Ø80 (□1.25" x Ø3")											
Turret Indexing Time	sec / step	0.3											
Axes													
Rapid Speed (X / Z / Y)	m/min (ipm)	10/12/- (393.7/472.4/-)	10/12/10 (393.7/472.4 /393.7)	10/10/- (393.7/393.7/-)	10/10/10 (393.7/393.7 /393.7)	10/9/- (393.7/354.3/-)	10/9/10 (393.7/354.3 /393.7)	10/12/- (393.7/472.4/-)	10/12/10 (393.7/472.4 /393.7)	10/10/- (393.7/393.7/-)	10/10/10 (393.7/393.7 /393.7)	10/9/- (393.7/354.3/-)	10/9/10 (393.7/354.3 /393.7)
Max. Stroke (X / Z / Y)	mm (inch)	485/2,650/- (19.1"/104.33" /-)	485/2,650/220 (19.1"/104.33" /8.66")	485/3,650/- (19.1"/143.7" /-)	485/3,650/220 (19.1"/143.7" /8.66")	485/5,250/- (19.1"/206.7"/-)	485/5,250/220 (19.1"/206.7" /8.66")	485/2,650/- (19.1"/104.33" /-)	485/2,650/220 (19.1"/104.33" /8.66")	485/3,650/- (19.1"/143.7" /-)	485/3,650/220 (19.1"/143.7" /8.66")	485/5,250/- (19.1"/206.7"/-)	485/5,250/220 (19.1"/206.7" /8.66")
Feed Motor (X / Z / Y)	kW (HP)	6/6/- (8/8/-)	6/6/7 (8/8/9.5)	6/6/- (8/8/-)	6/6/7 (8/8/9.5)	6/9/- (8/12/-)	6/9/7 (8/12/9.5)	6/6/- (8/8/-)	6/6/7 (8/8/9.5)	6/6/- (8/8/-)	6/6/7 (8/8/9.5)	6/9/- (8/12/-)	6/9/7 (8/12/9.5)
Tailstock													
Quill Dia.	mm (inch)	Ø160 (Ø6.3")											
Quill Stroke	mm (inch)	150 (5.91")											
Quill Taper	MT	# 6											
Turnmill (Opt.)													
Spindle Motor	kW (HP)	11/7.5 (15/10)											
Max. Spindle Speed	rpm	2,500											
Max. Drill / Collet Size	mm (inch)	Ø32 (Ø1.25") / ER50											
Min. Index Angle	° (deg)	0.001°											
Tank Capacity													
Lubrication	ℓ (gal)	12(3.17)											
Hydraulic	ℓ (gal)	50(13.21)											
Coolant	ℓ (gal)	400 (105.67)	550 (145.3)	700 (184.9)	400 (105.67)	550 (145.3)	700 (184.9)						
Power Sources													
Electrical Power Supply	kVA	85											
Dimension													
Height	mm (inch)	3,020 (118.9")											
Floor Space (L x W)	mm (inch)	6,860 x 3,030 (270.08" x 119.3")	6,860 x 3,180 (270.08" x 125.2")	7,860 x 3,030 (309.45" x 119.3")	7,860 x 3,180 (309.45" x 125.2")	9,760 x 3,030 (384.25" x 119.3")	9,760 x 3,180 (384.25" x 125.2")	6,860 x 3,030 (270.08" x 119.3")	6,860 x 3,180 (270.08" x 125.2")	7,860 x 3,030 (309.45" x 119.3")	7,860 x 3,180 (309.45" x 125.2")	9,760 x 3,180 (384.25" x 125.2")	
Weight	kg _f (lb _f)	18,000 (39,683)	19,500 (42,990)	23,000 (50,706)	24,500 (54,013)	29,000 (63,934)	31,500 (69,445)	18,500 (40,785)	20,000 (44,092)	23,500 (51,808)	25,000 (55,116)	30,500 (67,240)	32,000 (70,547)
NC Controller													
Fanuc 0i-TF (Opt.: Fanuc 31i-B)													

NC Specifications [Fanuc0i-TF]

※ - : Not available S : Standard O : Option

ITEM	SPECIFICATION	STD	MC	YMC
Controlled axis				
Controlled axis (Cs axis)	2-Axes	2-Axes	3-Axes	4-Axes
Simultaneously controlled axes	2-Axes	2-Axes	3-Axes	4-Axes
Least input increment	0.001mm, 0.001deg, 0.0001inch	S	S	S
Least input increment 1/10	0.0001mm, 0.0001deg, 0.00001inch	O	O	O
inch/metric conversion	G20, G21	S	S	S
Stored stroke check 1,2,3		S	S	S
Mirror image		S	S	S
Backlash compensation		S	S	S
Operation				
Automatic & MDI operation		S	S	S
Program number search		S	S	S
Sequence number search		S	S	S
Dry run, single block		S	S	S
Manual handle feed	1Unit	S	S	S
Manual handle feed rate	x1, x10, x100	S	S	S
Interpolation function				
Positioning	G00	S	S	S
Linear interpolation	G01	S	S	S
Circular interpolation	G02, G03	S	S	S
Dwell (Per seconds)	G04	S	S	S
Polar coordinate interpolation	G12.1/G13.1	-	S	S
Cylindrical interpolation	G7.1	-	S	S
Threading / Continuous threading	G32	S	S	S
Multiple threading / Threading Retract		S	S	S
Variable lead threading	G34	S	S	S
Reference position return 1st	G28	S	S	S
Reference position return check	G27	S	S	S
2,3,4th reference position return	G30	S	S	S
Arbitrary speed threading		O	O	O
Feed function				
Rapid traverse override	F0, F25, F50, F100	S	S	S
Feed per minute (mm/min)	G98	S	S	S
Feed per revolution (mm/rev)	G99	S	S	S
Rapid traverse bell-shaped acceleration/deceleration		S	S	S
Feedrate override	0-150 %	S	S	S
Jog feed override	0-1,260 mm/min	S	S	S
Tool function / compensation				
Tool function	T4-digits	S	S	S
Tool offset pairs	128 pairs	S	S	S
Tool nose radius compensation		S	S	S
Tool geometry / wear compensation		S	S	S
Tool life management		O	O	O
Automatic tool offset	Tool presetter option is required	O	O	O
Direct input tool offset value measured B	Tool presetter option is required	O	O	O
Others				
Display unit	10.4" Color LCD	S	S	S

※ YMC: Hi-TECH 850BB/ Hi-TECH 850BB+

ITEM	SPECIFICATION	STD	MC	YMC
Program input				
Tape code	EIA / ISO	S	S	S
Optional block skip	9ea	S	S	S
Program number	O4-Digits	S	S	S
Sequence number	N8-Digits	S	S	S
Decimal point programming		S	S	S
Coordinate system setting	G50	S	S	S
Coordinate system shift		S	S	S
Workpiece coordinate system	G54-G59	S	S	S
Workpiece coordinate system preset	G92.1	S	S	S
Direct drawing dimension programming		S	S	S
G code system	A	S	S	S
Programmable data input	G10	S	S	S
Sub program call	10Folds Nested	S	S	S
Custom macro B		S	S	S
Addition of custom macro -common variables	#100-#199, #500-#999	S	S	S
Canned cycles		S	S	S
Multiple repetitive cycle		S	S	S
Multiple repetitive cycle II		S	S	S
Canned cycles for drilling		S	S	S
Manual guide i		S	S	S
Spindle speed function				
Constant surface speed control	G96 / G97	S	S	S
Spindle override	50-120 %	S	S	S
Spindle orientation		S	S	S
Rigid tapping		O	S	S
Editing operation				
Part program storage length	1,280m (512 kB)	S	S	S
Number of register able programs	400ea	S	S	S
Background editing		S	S	S
Extended part program editing		S	S	S
Play back		S	S	S
Operation / Display				
Clock function		S	S	S
Self-diagnosis function		S	S	S
Alarm history display		S	S	S
Help function		S	S	S
Run hour and parts count display		S	S	S
Graphic function		S	S	S
Dynamic graphic display		O	O	O
Multi-language display	Korean, English, German, French, Italian, Chinese, Spanish, Portuguese, Polish, Hungarian, Swedish, Russian	S	S	S
Data input/output				
Reader / Puncher interface CH1	RS232C	S	S	S
Reader / Puncher interface CH2	RS232C	S	S	S
Ethernet interface		S	S	S
Memory card interface		S	S	S
USB card interface		S	S	S

Hwacheon Global Network

🇰🇷 Hwacheon Headquarter 🇺🇸 Hwacheon America 🇩🇪 Hwacheon Europe 🇸🇬 Hwacheon Asia



HWACHEON

Please call us for product inquiries.

www.hwacheon.com

The product design and specifications may change without prior notice.
Read the operation manual carefully and thoroughly before operating the product,
and always follow the safety instructions and warnings labels attached on the surfaces of the machines.

HEAD OFFICE

HWACHEON MACHINE TOOL CO., LTD.

123-17, HANAMSANDAN 4BEON-RO, GWANGSAN-GU, GWANGJU, KOREA
TEL: +82-62-951-5111 FAX: +82-62-951-0086

SEOUL OFFICE

46, BANGBAE-RO, SEOCHO-GU, SEOUL, KOREA
TEL: +82-2-523-7766 FAX: +82-2-523-2867

USA

HWACHEON MACHINERY AMERICA, INC.

555 BOND STREET, LINCOLNSHIRE, ILLINOIS, 60069, USA
TEL: +1-847-573-0100 FAX: +1-847-573-9900

SINGAPORE

HWACHEON ASIA PACIFIC PTE. LTD.

21 BUKIT BATOK CRESCENT, #08-79 WCEGA TOWER, SINGAPORE 658065
TEL: +65-6515-4357 FAX: +65-6515-4358

GERMANY

HWACHEON MACHINERY EUROPE GMBH

JOSEF-BAUMANN STR. 25, 44805, BOCHUM, GERMANY
TEL: +49-234-912-816-0 FAX: +49-234-912-816-60